

ALFRA HSS-Co RAIL RQX CUTTERS WITH ALFRA G2005PLUS COATING




WITH WELDON-SHANK 3/4"

- With Weldon-shank 3/4"
- Internal bore 1/4"
- Steel quality: Cobalt-containing special high-capacity speed steel with highest purity and improved tenacity. Specially coated with all new ALFRA G2005plus Coating and new geometry for higher performance.
- Perfectly suitable for wear-intensive applications, such as drilling rails.
- These tools can also be used on all Magnet Drilling Machines, especially with Weldon-arbor.

suitable for:
all portable Magnet Drilling Machines with 3/4" Weldon-shank, but also especially for Rail Drilling Machines of the makes

- Cembre
- Erico
- KKT
- Dubuis
- Universal
- Magtron
- Rotabroach
- other shanks available on request

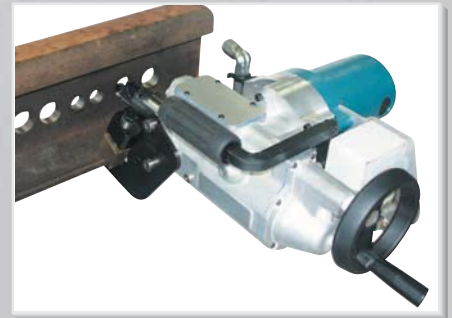

Ø Inch Ø Metric mm Prod.-No.
Cutting depth 1"

1/2"	13	195131
	14	195141
9/16"	15	195151
5/8"	16	195161
	17	195171
11/16"	18	195181
3/4"	19	195191
	20	195201
13/16"	21	195211
	22	195221
7/8"	23	195231
15/16"	24	195241
	25	195251
1"	26	195261
1-1/16"	27	195271
	28	195281
1-1/8"	29	195291
	30	195301
1-3/16"	31	195311
1-1/4"	32	195321
	33	195331
1-5/16"	34	195341
1-3/8"	35	195351
	36	195361
Ejector pin		1926500

1/4" x 3-1/8"



Ø Inch Ø Metric mm Prod.-No.
Cutting depth 2"

1/2"	13	195132
	14	195142
9/16"	15	195152
5/8"	16	195162
	17	195172
11/16"	18	195182
3/4"	19	195192
	20	195202
13/16"	21	195212
	22	195222
7/8"	23	195232
15/16"	24	195242
	25	195252
1"	26	195262
1-1/16"	27	195272
	28	195282
1-1/8"	29	195292
	30	195302
1-3/16"	31	195312
1-1/4"	32	195322
	33	195332
1-5/16"	34	195342
1-3/8"	35	195352
	36	195362
Ejector pin		1950500

1/4" x 3-15/16"

Tip:

Well-proven for drilling Hardox and similar high-tensile steels. Name your drilling problem, we are pleased to advise.

Another tip:

ASP-30 and ASP-60 for „impossible“ drilling jobs on request.

